

Linear double pulley specifically designed for crossing cables and zip lines. Sealed ball bearings for low friction and high speed (max 20 m/s). Aluminum alloy main body and stainless steel wheels. Accommodates ropes up to 13 mm and steel cables up to 12 mm in diameter. Large main attachment hole and secondary connection point on top.

Aluminium alloy main structure

Additional attachment point able to contain one connector




Aeration holes

Stainless steel wheels
Sealed ball bearings movement

Main attachment point able to contain two connectors

MBL 20 kN WLL 10 kN

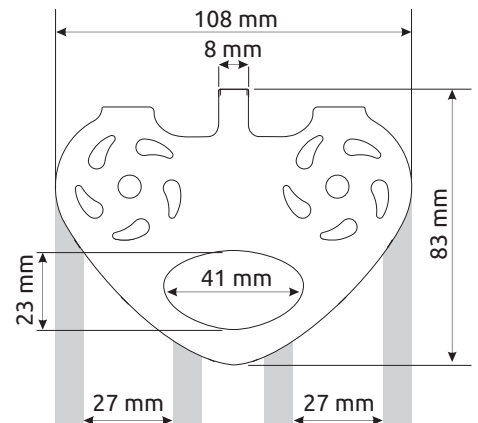

Ref.	Product name	Weight		Inner sheave diameter mm	Rope diameter Max - mm	Cable diameter Max - mm	Working load max kN	Breaking load kN	CE EN 12278
		g	oz						
3121	FLYTE	280	9.9	27	13	12	10	20	•

