


Adjustable work-positioning lanyard manufactured with a girth hitch attachment loop on one side and a steel snap hook connector on the other.

Constructed from heavy-duty 45 mm webbing, tested for superior abrasion resistance.

The length is easily adjustable from 92 to 173 cm via a high-strength, zinc-plated carbon steel buckle.

Equipped with a sliding PVC protective sleeve to provide maximum protection of the webbing against abrasion from rough surfaces and structural edges..

Integrated plastic end stopper designed to prevent unintended webbing slippage through the buckle assembly.

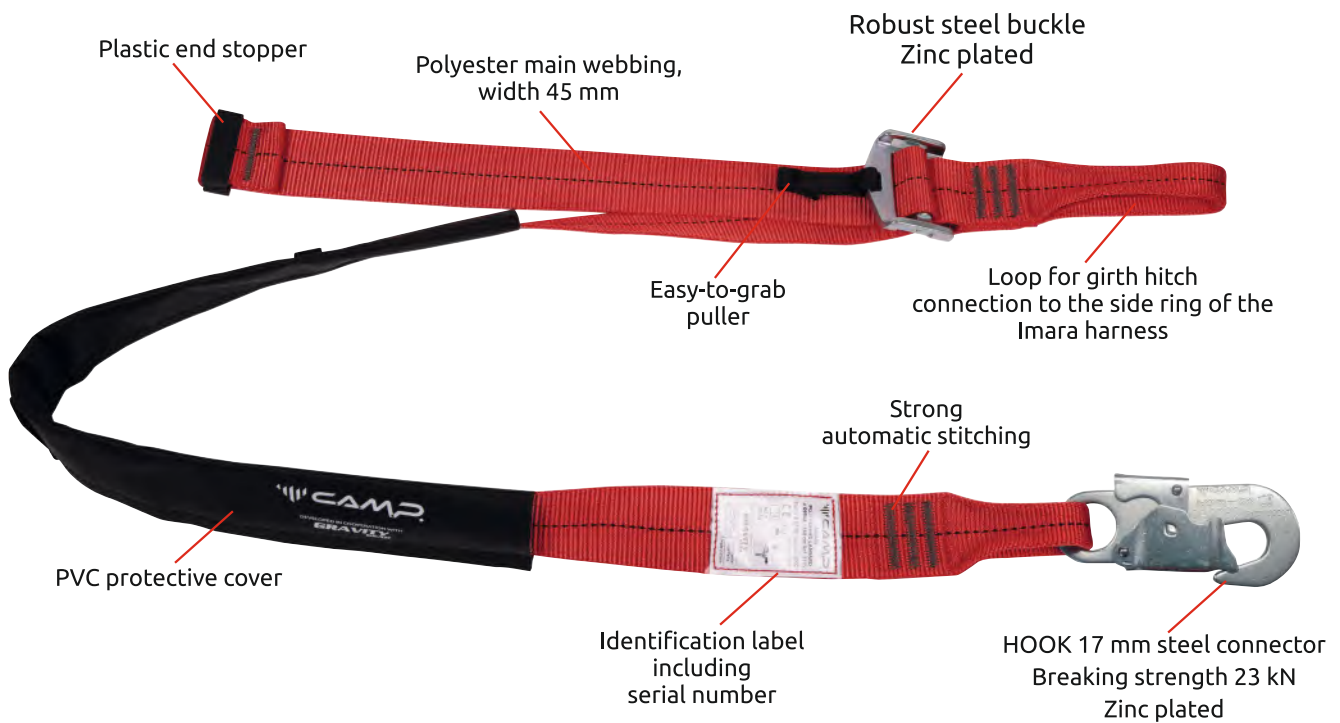

Ref.	Product name	Weight		Strength	CE EN 358
		g	oz	kN	
3705	AMANI POSITIONING LANYARD + 0986E	528	18.6	15	•